
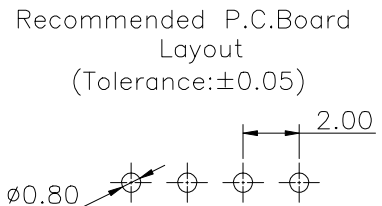
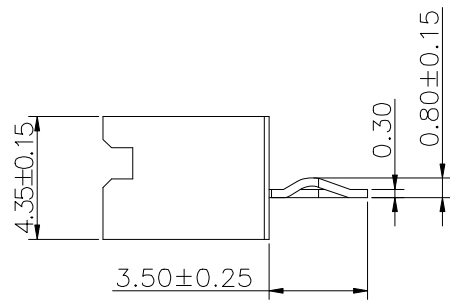
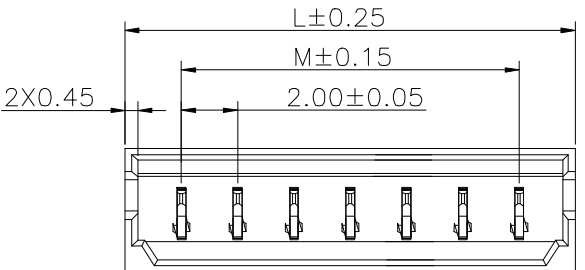


1 2 3 4 5 6 7 8 9

Specifications  
 Current Rating:3A AC/DC  
 Voltage Rating :125V AC/DC  
 Insulation Resistance:1000MΩ Min.  
 Dielectric Withstanding Volatge:500V AC/Minute  
 Contact Resistance:20mΩ Max.  
 After environmental testing:30mΩ Max  
 Temperature Range:-40°C to +105°C  
 Materials  
 Contact Material:Phosphor Bronze  
 Insulator Material:PA66 94V-0  
 All materials must meet GREENCONN hazardous substances control standards.

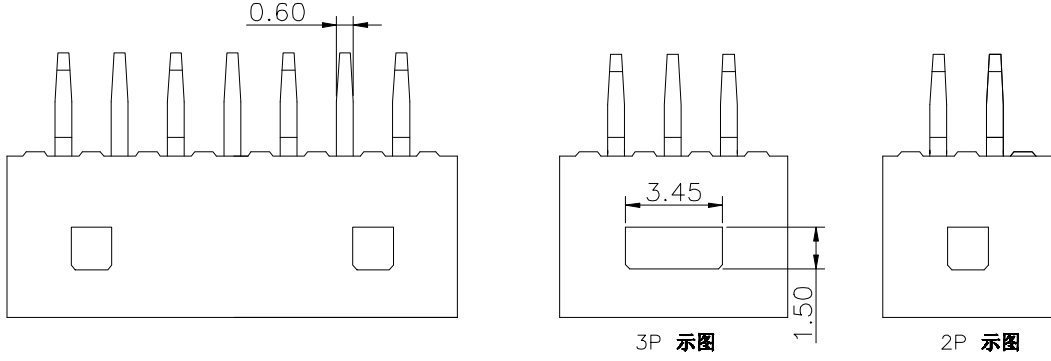

### Ordering Information


G WFA114 - XX XX A 800 E 5 S X

No. of Pins per Row 02~15  
 Standard Plating 01=Tin 22=Matte Tin  
 Material E=Nylon 66  
 Color 5=Biege  
 Standard Packing N=PE Bag

No. of PIN/ROW	Dimension Information	
	M	L
02	2.00	6.00
03	4.00	8.00
04	6.00	10.00
05	8.00	12.00
06	10.00	14.00
07	12.00	16.00
08	14.00	18.00
09	16.00	20.00
10	18.00	22.00
11	20.00	24.00
12	22.00	26.00
13	24.00	28.00
14	26.00	30.00
15	28.00	32.00

<b>格菱股份有限公司</b> <b>Greenconn Corporation</b>			GENERAL TOLERANCE		DESIGNED:	DATE:	DWG. NO.	TITLE.	
			X'±5.0'	X.±0.30					CHECKED:
REV. 01	UNIT. mm	SCALE. 4:1	PAGE. 1/1	.X'±3.0'	.X±0.25	CO SIGEND:	DATE:	PART NO.	
				.XX'±2.0'	.XX±0.15	APPROVED:	DATE:	GWFA114-XXXX A800E5SN	
				.XXX'±1.0'	.XXX±0.10				

1 2 3 4 5 6 7 8 9

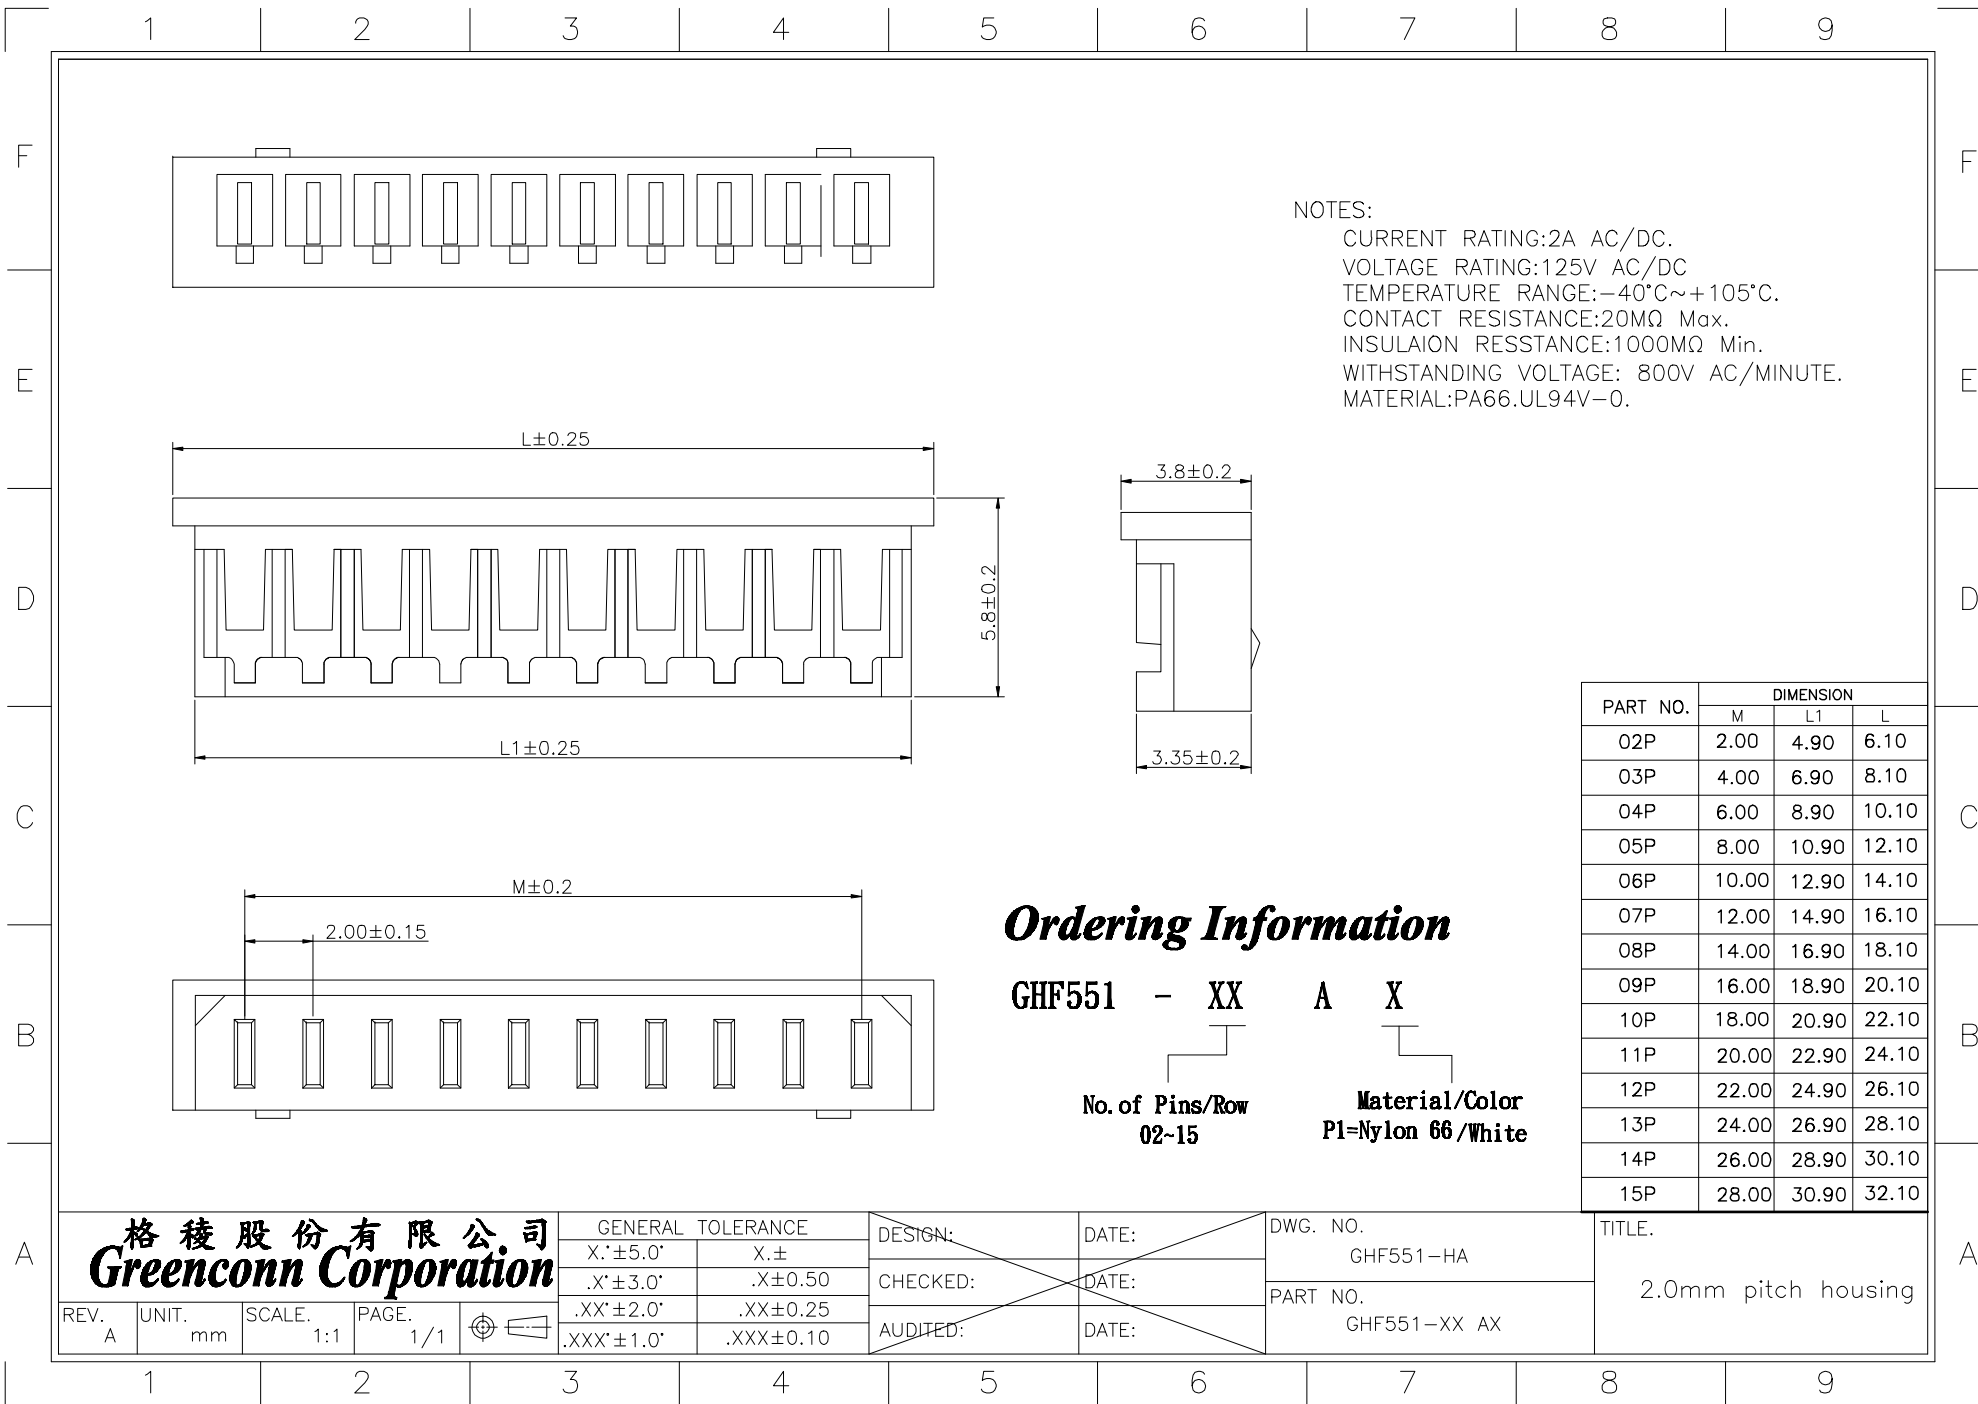

NOTES:  
 CURRENT RATING:2A AC/DC.  
 VOLTAGE RATING:125V AC/DC  
 TEMPERATURE RANGE:-40°C~+105°C.  
 CONTACT RESISTANCE:20MΩ Max.  
 INSULATION RESISTANCE:1000MΩ Min.  
 WITHSTANDING VOLTAGE: 800V AC/MINUTE.  
 MATERIAL:PA66.UL94V-0.

### Ordering Information

GHF551 - XX A X  
 No. of Pins/Row 02-15      Material/Color P1=Nylon 66/White

PART NO.	DIMENSION		
	M	L1	L
02P	2.00	4.90	6.10
03P	4.00	6.90	8.10
04P	6.00	8.90	10.10
05P	8.00	10.90	12.10
06P	10.00	12.90	14.10
07P	12.00	14.90	16.10
08P	14.00	16.90	18.10
09P	16.00	18.90	20.10
10P	18.00	20.90	22.10
11P	20.00	22.90	24.10
12P	22.00	24.90	26.10
13P	24.00	26.90	28.10
14P	26.00	28.90	30.10
15P	28.00	30.90	32.10

格稜股份有限公司  
**Greenconn Corporation**

GENERAL TOLERANCE	
X.'±5.0'	X.±
.X'±3.0'	.X±0.50
.XX'±2.0'	.XX±0.25
.XXX'±1.0'	.XXX±0.10

DESIGN:	DATE:
CHECKED:	DATE:
AUDITED:	DATE:

DWG. NO. GHF551-HA
PART NO. GHF551-XX AX

TITLE. 2.0mm pitch housing
-------------------------------

REV. A	UNIT. mm	SCALE. 1:1	PAGE. 1/1	
--------	----------	------------	-----------	--

1 2 3 4 5 6 7 8 9

F


E

D

C

B

A

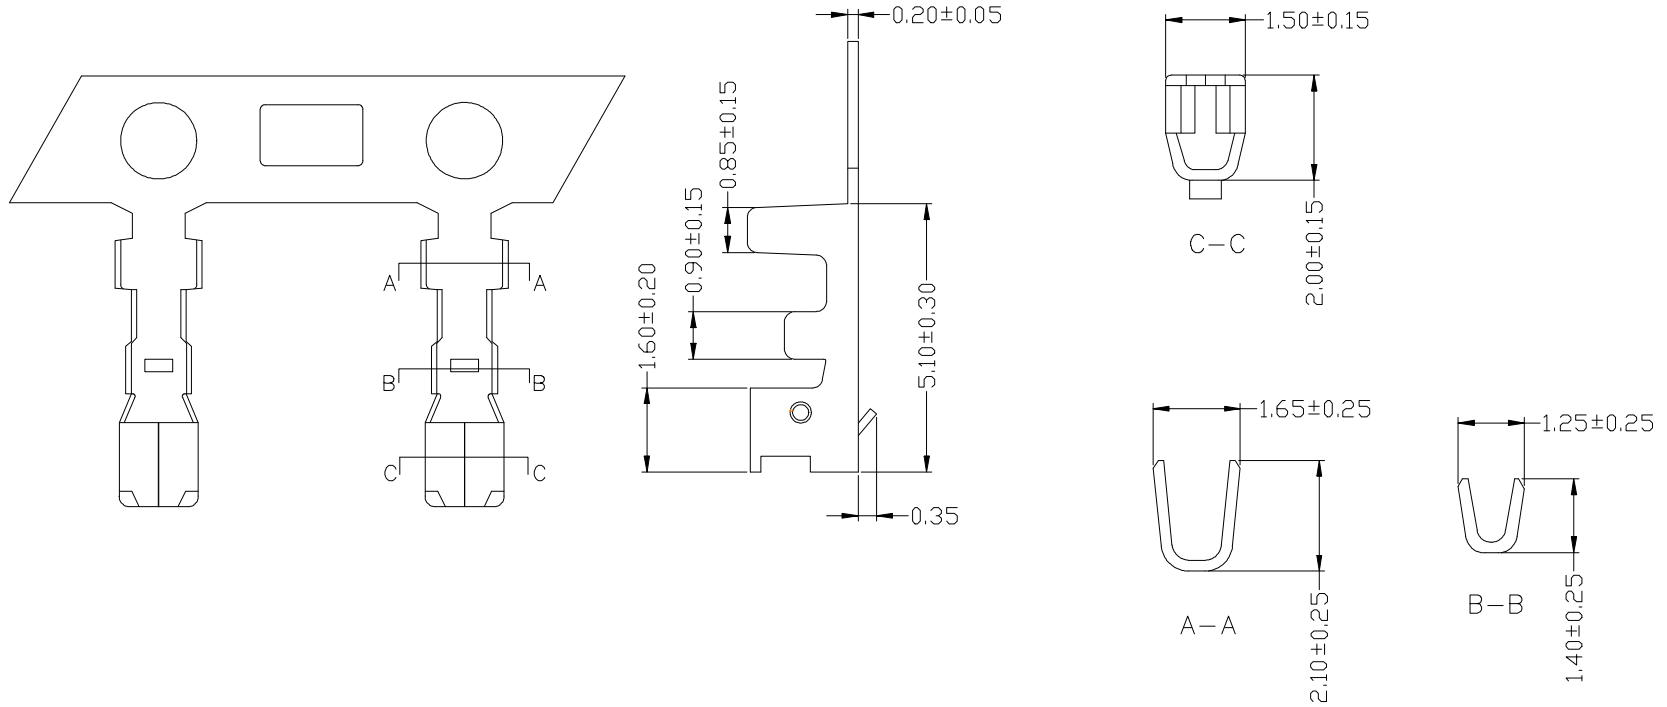

**Ordering Information**

**GRF137 - 01 XX XX**  
 Standard Plating 01=Tin      Materials AB=Phosphor bronze

Wire range	Insulation O.D.	Materials	Finish	Qty/re
AWG#26-28	1.4mm(max)	Phosphor Bronze	Tin-plated	10000

<b>格稜股份有限公司</b> <b>Greenconn Corporation</b>				GENERAL TOLERANCE		DESIGN:	DATE:	DWG. NO. GRF137-T1	TITLE. 2.00mm Pitch Terminal
				X: ±3.0'	X.±/				
REV. B	UNIT. mm	SCALE. 8:1	PAGE. 1/1	.X' ±2.0'	.X±0.25	APPROVED:	DATE:	PART NO. GRF137-01 XX AB	
				.XX' ±1.0'	.XX±0.15				
				.XXX' ±0.5'	.XXX±0.10				

1 2 3 4 5 6 7 8 9